



City of Quincy, Massachusetts
Purchasing Department
1305 Hancock Street
Quincy, MA 02169

Phone: 376-1060

Fax: 376-1074

ADDENDUM NUMBER 1

RE: ITB DUE : April 10, 2014 @ 11:00 A.M.

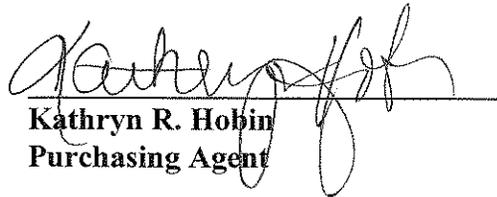
BID/RFP TITLE: SIDEWALK REPAIRS

PLEASE NOTE :

1. In the bid form page 0410-2 the item 701.000 (Cement concrete for walks) needs to be deleted as we are not using that item in this contract. (PLEASE SEE ATTACHED NEW PRICE PAGE)
2. The spec for item 151.22 - Gravel borrows for sidewalks (PAGE 02150-1) are not the correct spec for this contract. I have attached the correct copy.

Thank you.

PLEASE ACKNOWLEDGE THIS ADDENDUM IN THE BID FORM


Kathryn R. Hobin
Purchasing Agent

BID FORM

The Bidder agrees to perform all the Work described in the Contract Documents for the following unit prices or lump sum(s):

Item No.	Estimated Quantity	Brief Description of Items w/ Unit Bid Price in Words	Unit Bid Price in Figures	Amount in Figures
151.220	7650	GRAVEL BORROW FOR SIDEWALKS _____ per cubic yard	\$ _____	\$ _____
580.000	300	CURB REMOVE & RESET _____ per linear foot	\$ _____	\$ _____
702.100	7650	BITUMINOUS CONCRETE SIDEWALKS _____ per square yard	\$ _____	\$ _____
748.000	1	MOBILIZATION/DEMobilIZATION @ 5% _____ lump sum	\$ _____	
751.000	2200	LOAM AND SEEDING _____ per square yard	\$ _____	\$ _____
999.001	300	TRAFFIC POLICE DETAILS _____ Thirty Nine and No Cents per hour	\$ 44.00	\$ 13,200.00

TOTAL PAGE 00410-2: \$ _____

(Total Bid Amount Written In Words)

GRAVEL BORROW FOR SIDEWALKS

The work under this Item **151.22: Gravel Borrow for Sidewalks** shall conform to the relevant provisions of Section 150 of the Standard Specifications and the following:

This work shall consist of **trucking and placing** ordinary borrow in accordance with the details shown on the contract drawings, as specified in these specifications, and/or as directed by the Engineer. Gravel borrow shall consist of hard durable stone and coarse sand free from loam and clay, well graded and containing no stone having any dimensions greater than two (2) inches (Type C), as per Section M1.03.0. The gravel borrow shall conform to the following requirements:

Sieve	% Passing
1/2"	50-85
#4	40-75
#50	8-28
#200	0- 8

The gravel borrow shall be placed in six (6") inch maximum layers and then compacted to not less than 95% of maximum optimum density as determined by AASHTO Test Designations: T99-57, Method C.

Measurement of gravel borrow shall be the number of **square yards trucked and placed** in accordance with these Specifications and as directed by the Engineer. The number of square yards in place and accepted shall be measured by or calculated by the Engineer. Only gravel borrow placed within the established pay limits necessary to complete the work as established by the Engineer shall be considered for payment.

Payment for gravel borrow shall be made for the number of square yards as determined above at the contract unit price, per Square Yard, for **Item 151.22: Gravel Borrow for Sidewalks**, as set forth in the proposal, which price shall be full compensation for all trucking, equipment, tools, labor, backfilling, leveling and **fine grading and compaction**, etc., and all else incidental thereto. **The material (Gravel Borrow) for this item will be supplied by the owner (City of Quincy). Trucking and/or transporting the gravel borrow to the location of installation will be the responsibility of the Contractor. There will be no additional compensation for the trucking and/or transporting material. The location for the installation of the material will be excavated and rough-graded by the owner (City of Quincy).**

The measurement and payment provisions listed under Division 1, Section 01150 shall supplement the above payment provisions, as applicable.