



City of Quincy, Massachusetts
Purchasing Department
1305 Hancock Street
Quincy, MA 02169

Phone: 376-1060
Fax: 376-1074

ADDENDUM NUMBER 3

RE: PREVIOUSLY DUE: MARCH 1, 2012 @ 11:30 a.m.

BID/ITB TITLE: "400-Meter Track and Field at Faxon Field."

ITB DEADLINE DUE: MARCH 7, 2012 @ 11:00 a.m.

PLEASE NOTE:

- 1) *The trench detail on c-17 contradicts the trench detail on c-14. Can you please clarify which detail to go with so we can carry the correct amount of materials?***

Response: The HDPE/PVC trench detail on C-14 should be used for all non-perforated pipes not associated with field under drainage. The Section Through Track detail on C-17 shows the correct detail for perforated pipes associated with field under drainage.

- 2) *What are we supposed to do as far as powering the irrigation system. There is no detail for powering the project.***

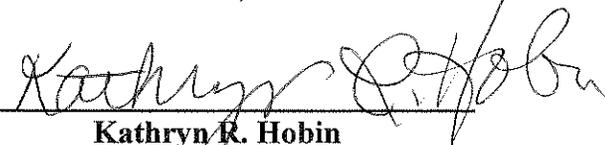
Response: The Utility Plan on C-8 shows routing for electric to the irrigation system. The contractor shall coordinate with the utility company to make a connection at the utility pole. Also refer to detail sheet C-20 and specification section 02810.

General Clarification:

The pavement thickness under the track is proposed at 5-inches total thickness, as shown on C-10 and C-15.

Thank you.

PLEASE SIGN THIS SHEET AND ATTACH IT TO YOUR BID, AS IT IS NOW A PART OF THE BID.


Kathryn R. Hobin
Purchasing Agent

Date: _____

Bidder's Signature: _____